

CORKSCREW CHARGER

BEFORE YOU BEGIN ...


1. Unpack the parts. Save the packing materials.
2. Match the parts to the photos below.
3. If you have each part, put a check in the box next to the picture of the part. Look in the carton again and check all of the packing materials to make sure you haven't missed anything.



WARNING:

**CHOKING HAZARD - Small parts
Not for children under 3 years.**

CHECK LIST



DARDA™ RACER (1)



LOOP HALVES (8)



14" STRAIGHT TRACK (2)



FLEXI-CURVE TRACK (2)



LARGE BASE PLATE (2)



TRACK JOINERS (2)




LOOP JOINERS (8)



IF A PART IS MISSING OR DAMAGED ...


The store where you purchased this item does not have parts. You will get the easiest service from **Walthers**. Tell us the part(s) needed and be sure to include your name and address printed clearly. Mail to Wm. K. Walthers, Inc./ 5601 W. Florist Ave./Milwaukee, WI 53218/ Attn.: DARDA.

READ ALL INSTRUCTIONS BEFORE YOU BUILD YOUR TRACK LAYOUT!!!

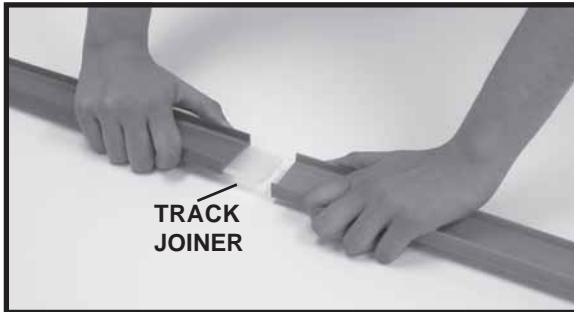

USING TRACK JOINERS

Slide the Track Joiner - with the raised edges facing down - half way into the channel on the underside of the track piece. Now slide the adjoining track piece over the open half of the joiner, so that it meets the first piece. Be sure the tracks meet with no gaps.

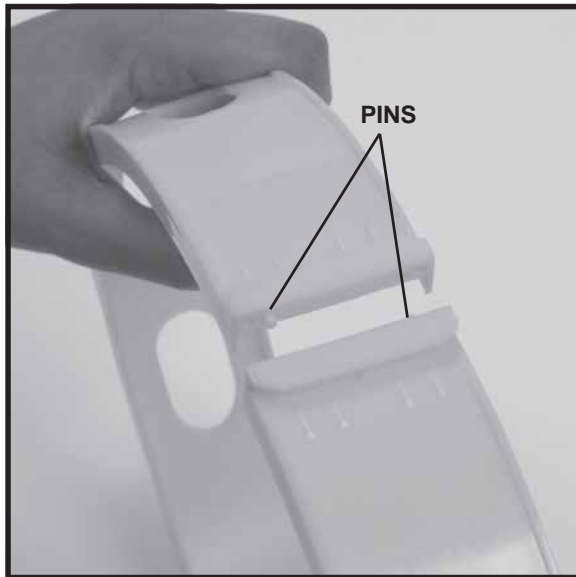


MAKING LOOPS

Put two **LOOP HALVES** together so that the **PINS** at the top of each loop half go into the proper holes, creating a tight fitting seam between the two loop halves.

Holding the **LOOP HALVES** together, slide one **LOOP JOINER** over one end of the seam and the other loop joiner over the other end of the seam. Squeeze together to secure the joiners to the loop. **NOTE: Make the 4 loops in this set before building the track.**



FIGURE 1

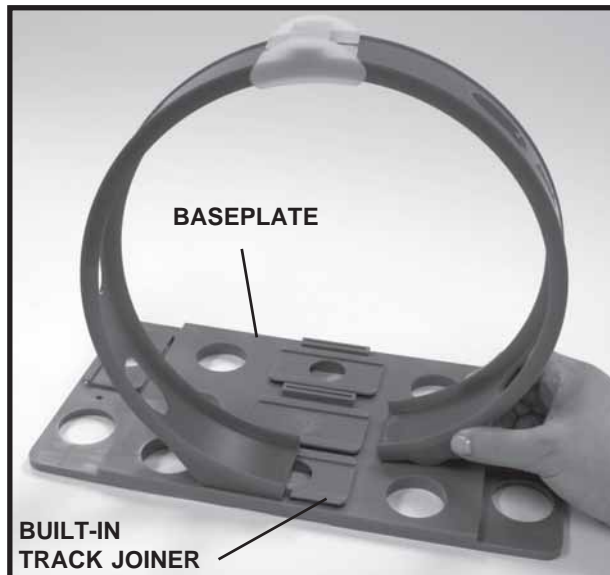

STEP 1 • ATTACH LOOPS TO BASEPLATE


Select 2 of the loops you made from the **MAKING LOOPS** step above. Take **one loop** and attach it to the **baseplate** by sliding the open ends of the loop halfway over the **built-in track joiners** as shown in **FIGURE 1**.

Now take the **second loop** and slide one end halfway over the **middle built-in track joiner** making sure the loop meets flush with the first loop and there are no gaps. Now slide the other half of the loop onto the **third built-in joiner** as shown in **FIGURE 1A**.

FIGURE 1A



FIGURE 2

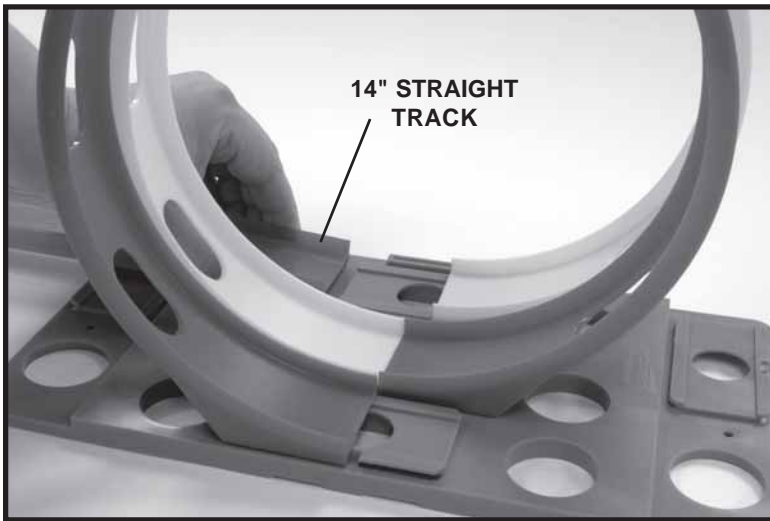

STEP 2 • CONNECT STRAIGHT TRACK

Attach a 14" straight track to the third built-in track joiner by sliding the straight track over half of the built-in track joiner, making sure the straight track meets flush with the last loop and there are no gaps. **FIGURE 2**

Your first group of loops is now complete. Repeat steps with remaining 2 loops, 14" straight track and baseplate. Your loops will look like the 2 loops in **FIGURE 2A**.



FIGURE 2A

STEP 3 • ATTACH FLEXI-CURVES

Position each flexi-curve as shown in **FIGURE 3**. Using track joiners, attach one flexi-curve to each 14" straight track. Be sure there are no gaps and that the track joiners are completely covered. Use the second flexi-curve and slide each end over the built-in track joiners on each baseplate. Flexi-curves should meet flush with the loop leaving no gaps. See **Figure 3A**.

FIGURE 3



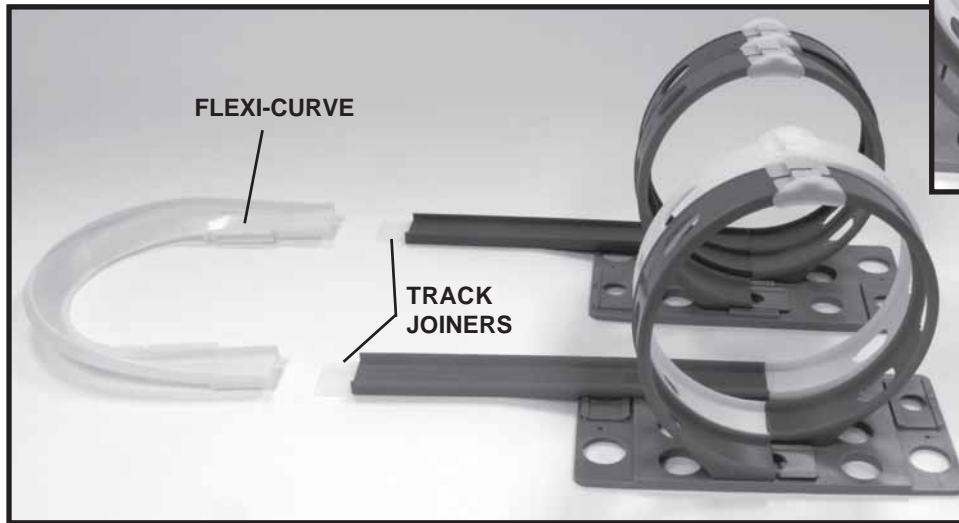


FIGURE 3A

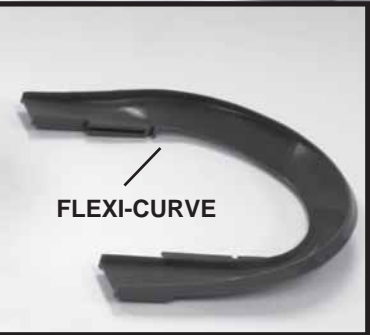

FLEXI-CURVE

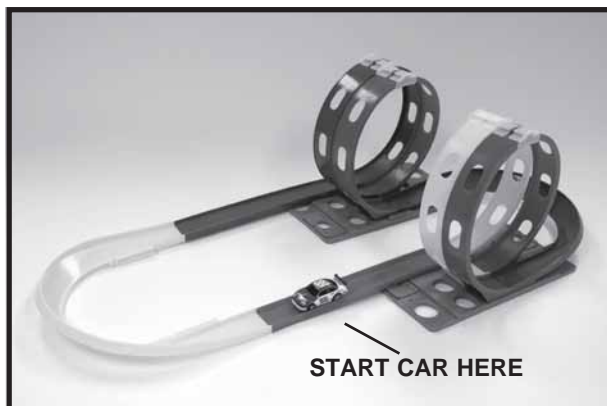


STEP 4 • SPEEDWAY TO FUN!

The track layout is complete! Place the car on the track as shown in the photo to the left. Placing your car here will give it maximum speed. Experiment by placing it in other positions on the track.


DRIVER... START YOUR ENGINE!!!!.....

READY, SET, GO!!!


1. Press down on vehicle body until you hear a click.



2. While still pressing down, roll vehicle back & forth until the clicking sound gets louder.



3. Lift your hand up off the vehicle while rolling forward. Watch it go!



Tips

- For consistent performance position your Darda™ Racers on the track layout as shown on page 3.
- Be sure that the vehicle is fully wound by listening for the click to get louder before releasing it.
- Have fun with your Darda™ vehicles on or off the Darda track. For longer life **DO NOT** run on carpet.
- Replacement motors are available at your local specialty toy store; or contact Darda at the number below.

ALTERNATE LAYOUT.

Darda™ track sets are very versatile, and you can build many track layouts from the parts. Here are two more raceways you can make with the parts in your **CORKSCREW CHARGER** set. After that...

USE YOUR IMAGINATION!



TRACK TIPS

- Read all assembly instructions carefully.
- If your vehicle has trouble making it around the track, try the following: 1) Be sure that all track seams meet and connections are secure. Track pieces must meet flush against each other where they are connected with track and loop joiners, without gaps or bumps at the joint. 2) It may be necessary to play with, adjust, or slightly bend loops in track layouts to maximize performance. Remember Darda™ track is flexible.
- Darda™ track layouts can be set up on any flat surface. While it is not ideal, your track can be set up on carpet. We do recommend dusting off the track before use so that the dust particles from the carpet do not jam the motor. We do not recommend running the vehicle itself on carpet.
- Double check your assembly instructions, if you still have difficulty we want to help!

Call our toll free consumer hotline... 1-866-833-1468. (Mon.-Fri., 9:00am-3:30pm (Central Standard Time))