


## FIREBALL CLIMB

### BEFORE YOU BEGIN ...

1. Unpack the parts. Save the packing materials.
2. Match the parts to the drawings below.
3. If you have each part, put a check in the box next to the picture of the part. Look in the carton again and check all of the packing materials to make sure you haven't missed anything.

 **WARNING:**  
**CHOKING HAZARD - Small parts**  
**Not for children under 3 years.**

#### CHECK LIST



1 ULTRA SPEED™ DARDA®  
MUSTANG® RACER



2 14" (35.56 cm) STRAIGHT  
TRACKS



1 CURVED SUPPORT TRACK



4 LOOP HALVES



1 FLEXI-CURVE TRACK



1 40" (1.02m) FLEX TRACK



4 LOOP JOINERS



3 TRACK JOINERS



1 LARGE BASE PLATE




2 STACKING BRIDGES



### IF A PART IS MISSING OR DAMAGED ...


The store where you purchased this item does not have parts. You will get the easiest service from **Walthers**. Tell us the part(s) needed and be sure to include your name and address printed clearly. Mail to Wm. K. Walthers, Inc./ 5601 W. Florist Ave./Milwaukee, WI 53218/ Attn.: DARDA.

# READ ALL INSTRUCTIONS BEFORE YOU BUILD YOUR TRACK LAYOUT!!!

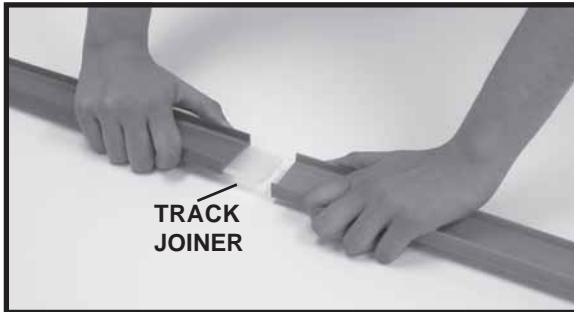

## USING TRACK JOINERS

Slide the Track Joiner - with the raised edges facing down - half way into the channel on the underside of the track piece. Now slide the adjoining track piece over the open half of the joiner, so that it meets the first piece. Be sure the tracks meet with no gaps.

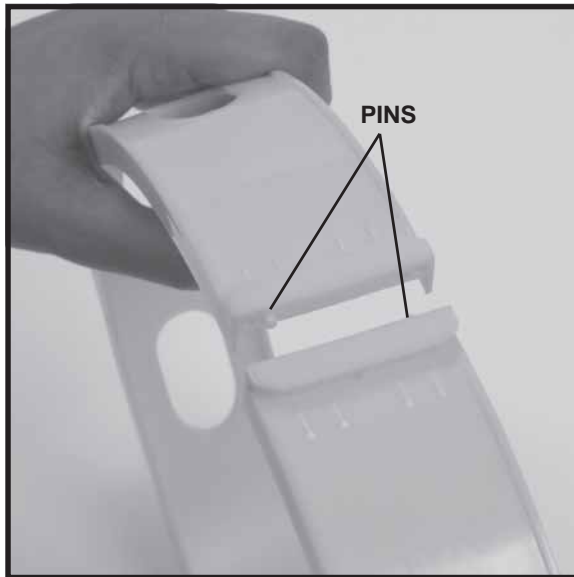


## MAKING LOOPS

Put two **LOOP HALVES** together so that the **PINS** at the top of each loop half go into the proper holes, creating a tight fitting seam between the two loop halves.

Holding the **LOOP HALVES** together, slide one **LOOP JOINER** over one end of the seam and the other loop joiner over the other end of the seam. Squeeze together to secure the joiners to the loop. **NOTE: Make the 2 loops in this set before building the track.**



FIGURE 1

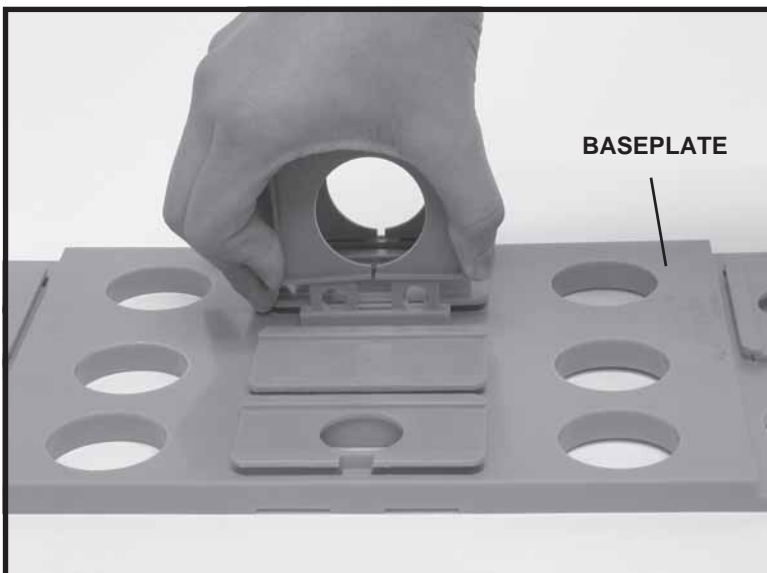

## STEP 1 • BUILD THE TRACK

Place the first **BRIDGE** on **BASEPLATE** by squeezing the bridge as shown in **FIGURE 1**. The **BRIDGE** will snap into place on the **BASEPLATE**. Add second **BRIDGE** by sliding it into the slots of the first. **NOTE: The direction of the hole on the two bridges will be facing opposite ways.**


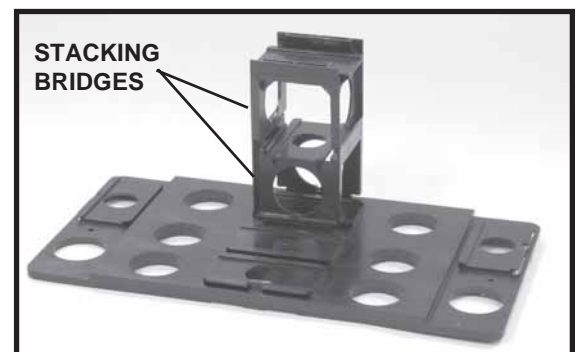


FIGURE 2

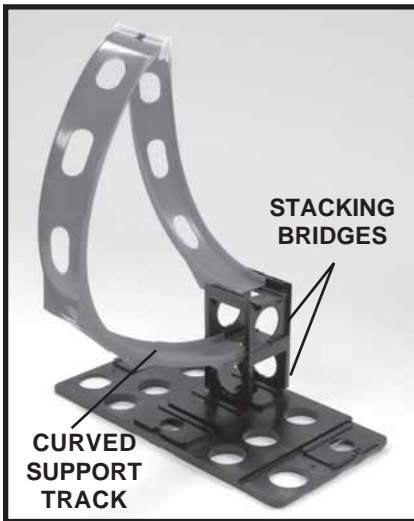

**STEP 2 • CONNECT SUPPORT TRACK AND LOOP**

Place the **BASEPLATE** as shown in **FIGURE 2**. Attach the **7" CURVED SUPPORT TRACK** to the middle of the stacking bridges. The curve should be facing as shown.

Slide a **TRACK JOINER** onto the end of the **7" CURVE TRACK**. Attach one end of the loop to this track joiner. Attach the other end of the loop to the top stacking bridge.

Your track should now look like **FIGURE 2**.

**STEP 3 • ATTACHING LOOP AND FLEX TRACK**

Locate the **40" FLEX TRACK**, attach one end to the same **STACKING BRIDGE** that the **7" CURVE TRACK** is on. The two should meet in the middle of the bridge. Use the **FLEX TRACK** to make a loop, and attach to the built-in track joiner on the baseplate, facing the opposite way.

Take the **REMAINING LOOP** and attach it to the **TOP STACKING BRIDGE**, so it joins the first loop. Then feed it through the first loop and attach it to the **BASEPLATE**, as shown in **FIGURE 3**.

Your track should now look like **FIGURE 3**.

FIGURE 3


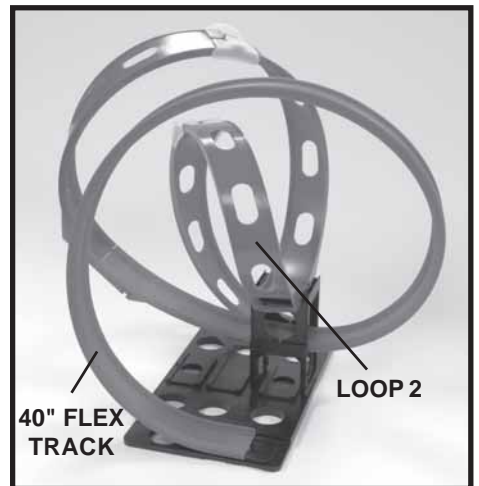


FIGURE 4

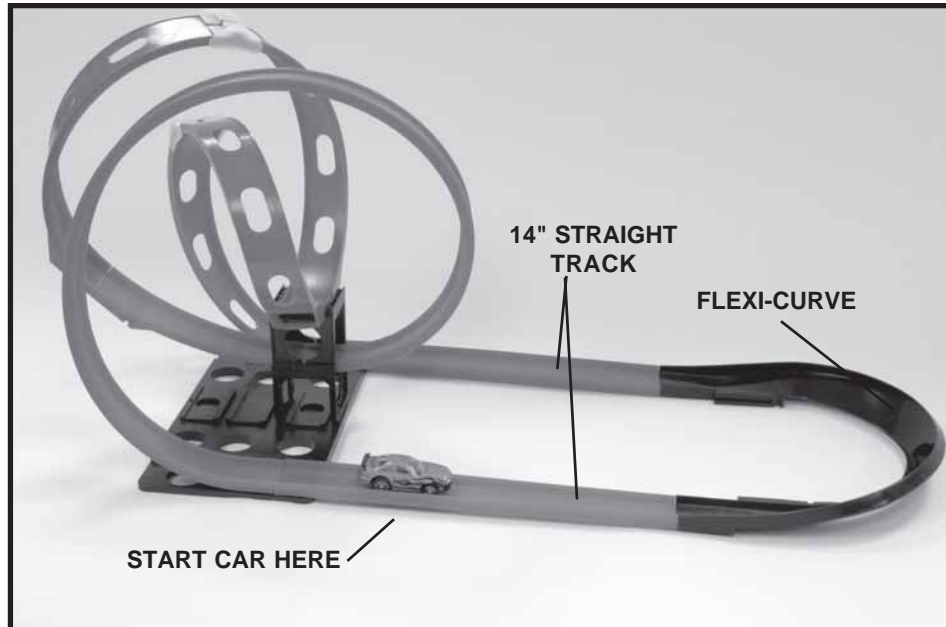


**STEP 4 • SPEEDWAY TO FUN!**


Connect a **14" STRAIGHT TRACK** to the end of the flex track on the **BASEPLATE**. Attach another **14" STRAIGHT TRACK** to the end of the loop on the other side of the baseplate. Then use the remaining **TRACK JOINERS** to attach the **FLEXI-CURVE** to the ends of the **14" STRAIGHT TRACKS**. See **FIGURE 4**.

# READY, SET, GO!!!


1. Press down on vehicle body until you hear a click.



2. While still pressing down, roll vehicle back & forth until the clicking sound gets louder.



3. Lift your hand up off the vehicle while rolling forward. Watch it go!



## Tips

- For consistent performance, position your Darda Racer on the track layout as shown on page 3.
- Be sure that the vehicle is fully wound by listening for the click to get louder before releasing it.
- Have fun with your Darda vehicles on or off the Darda track. For longer life **DO NOT** run on carpet.
- Replacement motors are available at your local specialty toy store; or contact Darda at the number below.

## ALTERNATE LAYOUTS.

Darda track sets are very versatile, and you can build many track layouts from the parts. Here are 2 other raceways you can make with the parts in your **FIREBALL CLIMB** set. After that...

## USE YOUR IMAGINATION!



## TRACK TIPS

- Read all assembly instructions carefully.
- If your vehicle has trouble making it around the track, try the following: 1) Be sure that all track seams meet and connections are secure. Track pieces must meet flush against each other where they are connected with track and loop joiners, without gaps or bumps at the joint. 2) It may be necessary to play with, adjust, or slightly bend loops in track layouts to maximize performance. Remember Darda track is flexible.
- Darda track layouts can be set up on any flat surface. While it is not ideal, your track can be set up on carpet. We do recommend dusting off the track before use so that the dust particles from the carpet do not jam the motor. We do not recommend running the vehicle itself on carpet.
- Double check your assembly instructions, if you still have difficulty we want to help!

Call our toll free consumer hotline... 1-866-833-1468. (Mon.-Fri., 9:00am-3:30pm (Central Standard Time))